

1. GENERAL INFORMATION

1.1 Dealer Information

Contact Name
 Date (MM/DD/YY)
 Phone
 Email
 Company

1.3 Project


Purchase Order#
 Job Name
 Location
 Notes

STANDARD FEATURES


Hydraulic 2:1 roped full 2-stop elevator package, 950lbs capacity, variable speed valve, submersed motor, automatic LED cab lighting, automatic emergency cab lowering, full automatic functionality, illuminated stainless steel car operator panel with phone and DPI, illuminated stainless steel call stations with DPI, 4 LED pot lights, solid stainless steel handrail.

2. BASICS

2.1 FINISHED HOISTWAY DIMENSIONS

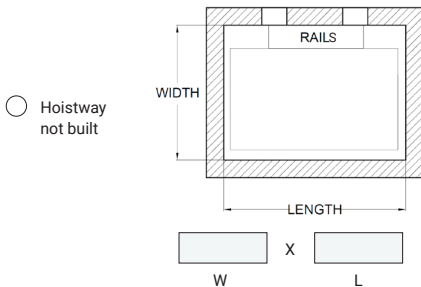

2.2 RAIL LOCATION



2.3 LANDINGS

2
 3
 4

HOISTWAY CONSTRUCTION

Wood
 Concrete

2.4. CAB DIMENSIONS

Standard:
 30 - 42" W x 36 - 50" L
 width x length

Custom:* width x length
 (44" max) (60" max)

**total custom dimensions cannot exceed 15 sq ft.*

2.5 CAB CONFIGURATION

Front Opening
 Pass Through (2 Gates)
 90 Degrees (2 Gates)

2.7 MACHINE ROOM ADJACENT (15ft)

Yes
 No Distance

2.6 CAB HEIGHT & OVERHEAD REQUIREMENTS

CAB HEIGHT	OVERHEAD REQUIREMENTS	
<input type="radio"/> 7' (84")	<input type="radio"/> 8' (96")	<input type="radio"/> 8'7 (104")
	CAB GATE	CAB AUTO DOORS

2.8 CAB FINISHES


<input type="radio"/> White Chocolate	<input type="radio"/> Dark Chocolate	<input type="radio"/> Unfinished MDF (Paint Grade)	<input type="radio"/> Urban Vibe	<input type="radio"/> Nutmeg	<input type="radio"/> Stainless Steel (Optional)	<input type="radio"/> Clear Acrylic (Optional)

2.9 GATE FINISHES

<input type="radio"/> Polymer White	<input type="radio"/> Stainless Steel (2-3 speed doors)	<input type="radio"/> Clear Acrylic (Standard)

IMPORTANT

OVERHEAD: Minimum overhead requirement in residential builds is 96 in. Some door models require 104 in.
PIT DEPTH: Minimum depth requirement in residential builds is 12 in.

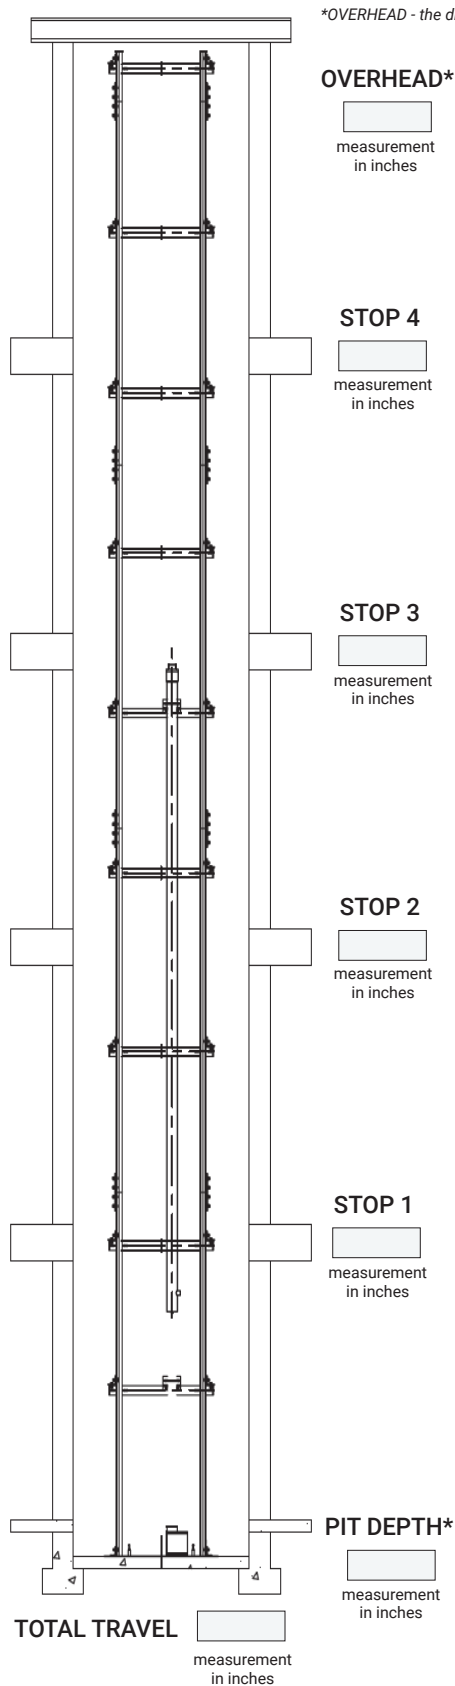

*OVERHEAD - the distance from the finished floor to the top of the hoistway on the top landing.

2.10 CAB DOORS

- Manual 4Panel Gate (select finish on previous page) - Standard
- Automatic 4Panel Gate (select finish on previous page)
- 2-Speed Full Automatic SS (requires a min 42" wide platform)

NOTE: SS DENOTES STAINLESS STEEL


2.11 LANDING DOORS

- Locks Only - Door by Others - Standard
- 36" Wooden Door Jambs
- 2-Speed Full Automatic SS (requires a min 42" wide platform)

NOTE: 2-SPEED AND 3-SPEED MUST MATCH CAB DOORS


2.12 LANDING DOOR SWINGS

- | | | |
|--------|----------------------------------|---------------------------------|
| Stop 4 | <input type="radio"/> Right Hand | <input type="radio"/> Left Hand |
| Stop 3 | <input type="radio"/> Right Hand | <input type="radio"/> Left Hand |
| Stop 2 | <input type="radio"/> Right Hand | <input type="radio"/> Left Hand |
| Stop 1 | <input type="radio"/> Right Hand | <input type="radio"/> Left Hand |

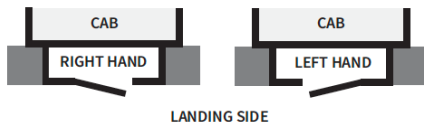

2.13 LANDING DOOR LOCATION

- | | | | | |
|--------|-------------------------|-------------------------|-------------------------|-------------------------|
| Stop 4 | <input type="radio"/> A | <input type="radio"/> B | <input type="radio"/> C | <input type="radio"/> D |
| Stop 3 | <input type="radio"/> A | <input type="radio"/> B | <input type="radio"/> C | <input type="radio"/> D |
| Stop 2 | <input type="radio"/> A | <input type="radio"/> B | <input type="radio"/> C | <input type="radio"/> D |
| Stop 1 | <input type="radio"/> A | <input type="radio"/> B | <input type="radio"/> C | <input type="radio"/> D |



5110 Atlantic Ave. Raleigh, NC 27616
 1-800-790-1635 | AmeriGlide.com

*PIT DEPTH - minimum depth requirement in residential builds is 12 in.