



5110 Atlantic Ave. Raleigh, NC 27616
1-800-790-1635 | AmeriGlide.com

1. GENERAL INFORMATION

1.1 Customer Information

Contact Name
Date (MM/DD/YY)
Phone
Email


1.2 Project

Quote Reference #
Job Name
Location
Notes


Standard Features

3 HP Winding Drum Drive System for two stops. 950lbs capacity, automatic LED cab lighting, automatic emergency cab lowering, automatic functionality, illuminated stainless steel car operating panel with digital position indicator, stainless steel call stations with digital position indicator, two electromechanical door locks, two LED pot lights, stainless steel handrail, 84" tall cab, concealed in-cabinet phone, and a sleek modern cab gate with optional operator.

2. Finished Hoistway Dimensions

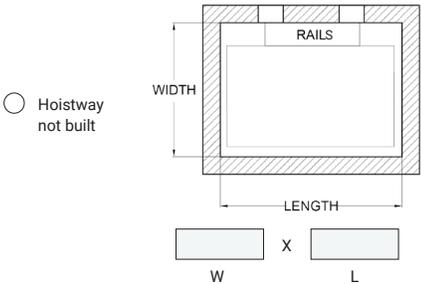

3. Rail Location

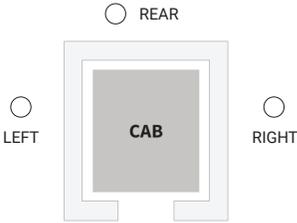

*When facing cab at bottom landing

4. Landings

2* 3 4

5. Hoistway Construction

Wood Concrete

6. Voltage

220V / 1Ph

7. CAB Dimension

Standard:
 30 - 42" W x 36 - 48" L
width x length
Custom:* width x length
(44" max) (60" max)
**total custom dimensions cannot exceed 15 sq ft.*

8. CAB Configuration

Front Opening*
 Pass Through (2 gates)
 90° Opening (2 gates)

9. CAB Finishes

Grid of color swatches for cab finishes: Eclipse, Frisquet, Dorato Grey, Classic Chocolate, Otter Grey, Shipsaw, Serenity, Etrusco, Charcoal, Sheer Linen, Unfinished MDF, Acrylic.


10. Gate Finishes

Four gate finish options with labels: White with Silver Frame (Standard), Clear Acrylic with Silver Frame (Standard), Clear Acrylic with Black Frame (Custom), White with Black Frame (Custom).

IMPORTANT

OVERHEAD: Minimum overhead requirement in residential builds is 106 inches.

PIT DEPTH: Minimum depth requirement in residential builds is 10 inches.

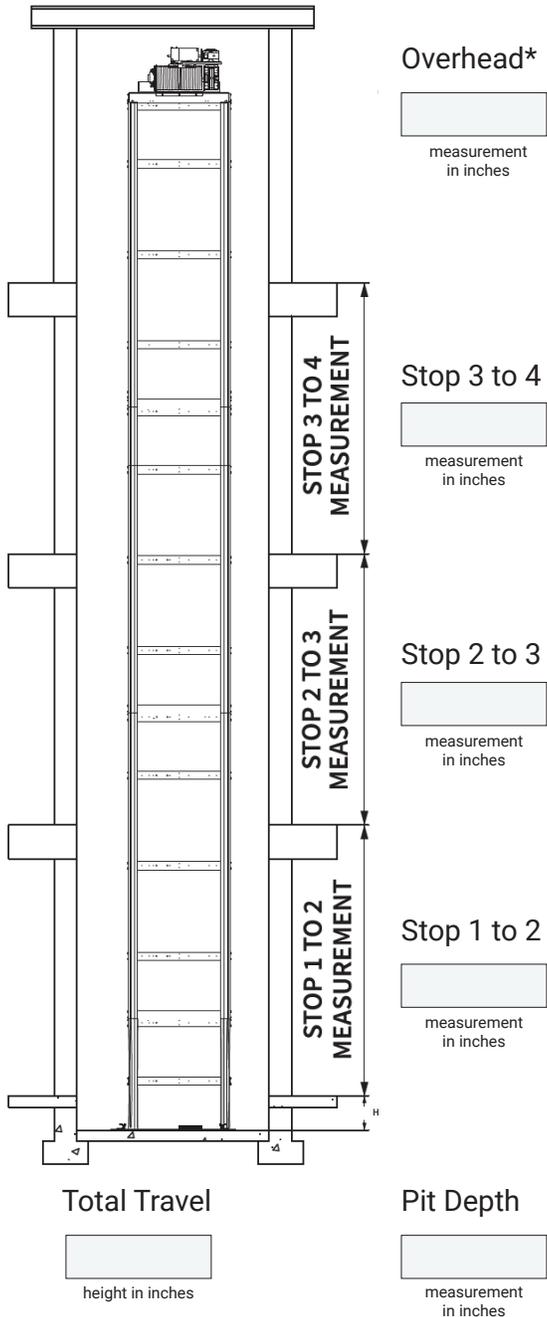

11. CAB Doors

Manual 4 Panel Gate (select finish on the previous page)


12. Landing Doors

Locks Only - Door by Others

36" Wooden Door Jambs


13. Landing Door Swings

STOP 4	<input type="radio"/> Right Hand	<input type="radio"/> Left Hand	<input type="radio"/> None
STOP 3	<input type="radio"/> Right Hand	<input type="radio"/> Left Hand	<input type="radio"/> None
STOP 2	<input type="radio"/> Right Hand	<input type="radio"/> Left Hand	
STOP 1	<input type="radio"/> Right Hand	<input type="radio"/> Left Hand	

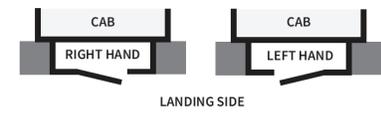

14. Landing Door Location

RAIL LOCATION	<input type="radio"/> A	<input type="radio"/> B	<input type="radio"/> C	<input type="radio"/> D	
STOP 4	<input type="radio"/> A	<input type="radio"/> B	<input type="radio"/> C	<input type="radio"/> D	<input type="radio"/> None
STOP 3	<input type="radio"/> A	<input type="radio"/> B	<input type="radio"/> C	<input type="radio"/> D	<input type="radio"/> None
STOP 2	<input type="radio"/> A	<input type="radio"/> B	<input type="radio"/> C	<input type="radio"/> D	<input type="radio"/> None
STOP 1	<input type="radio"/> A	<input type="radio"/> B	<input type="radio"/> C	<input type="radio"/> D	



5110 Atlantic Ave. Raleigh, NC 27616
1-800-790-1635 | AmeriGlide.com